


# 




Neoflex™ Stratus Series is a 100% EPDM rubber floor covering made of polymerically bound synthetic rubber, which incorporates an advanced polyurethane coating technology.

Designed for use in indoor fitness and leisure settings, it exhibits excellent physical properties of EPDM rubber floors such as user comfort, flexibility, durability, sound insulation and step noise reduction.

Neoflex Fitness Flooring is globally recognized as a superior

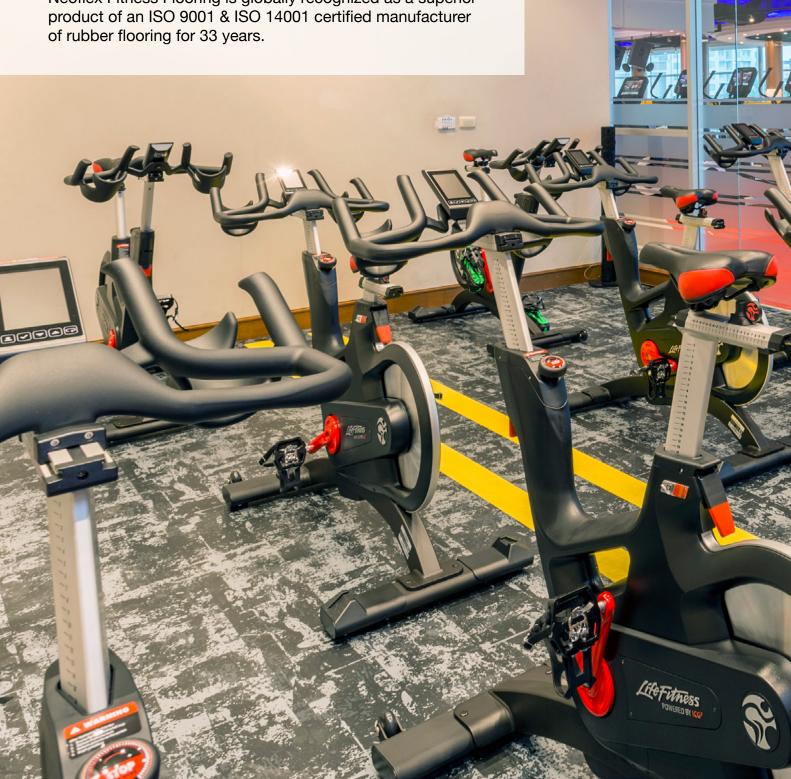

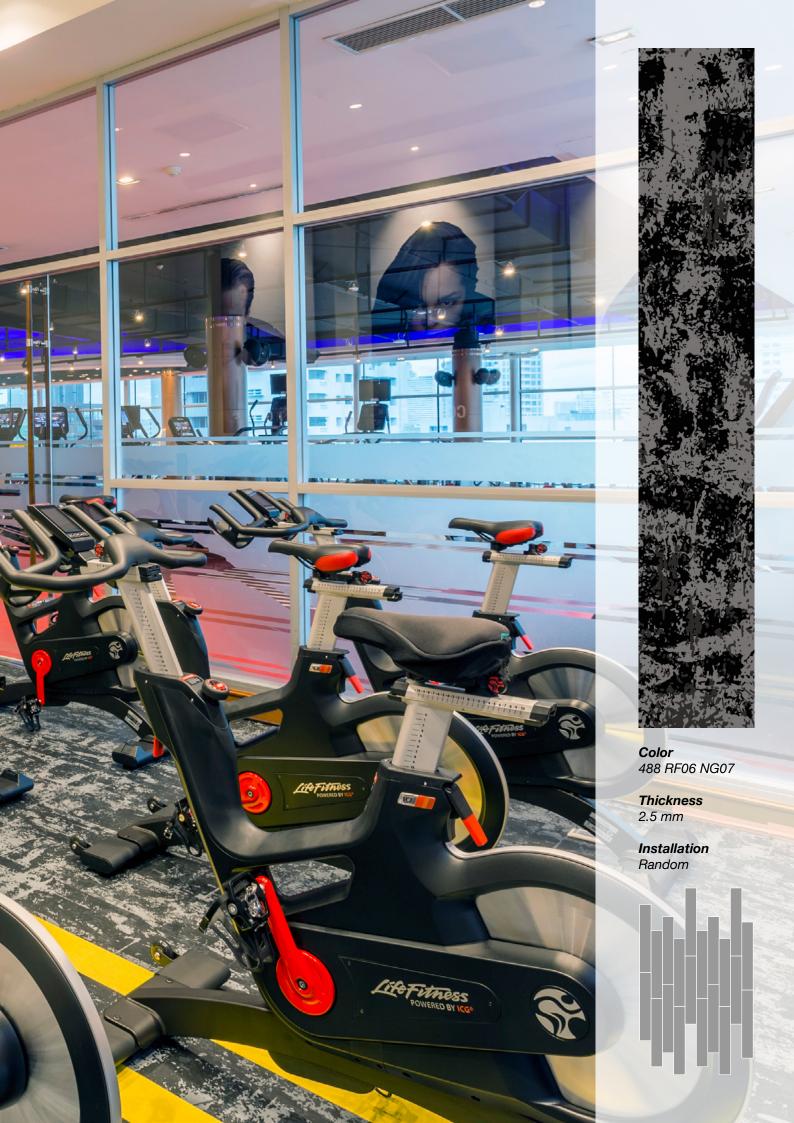



**Color** 488 RF17 NG18


**Thickness** 6 mm

**Installation** Random







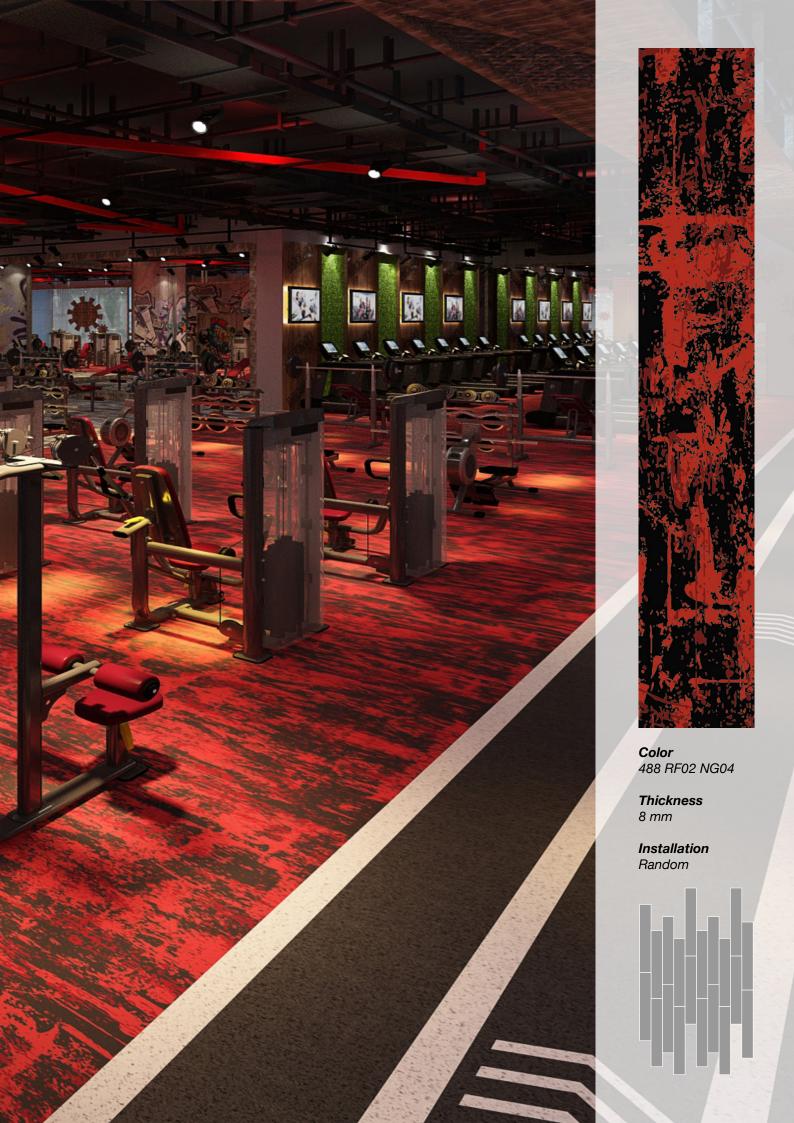




**Color** 488 RF05 NG08

Thickness 10 mm

**Installation** Random



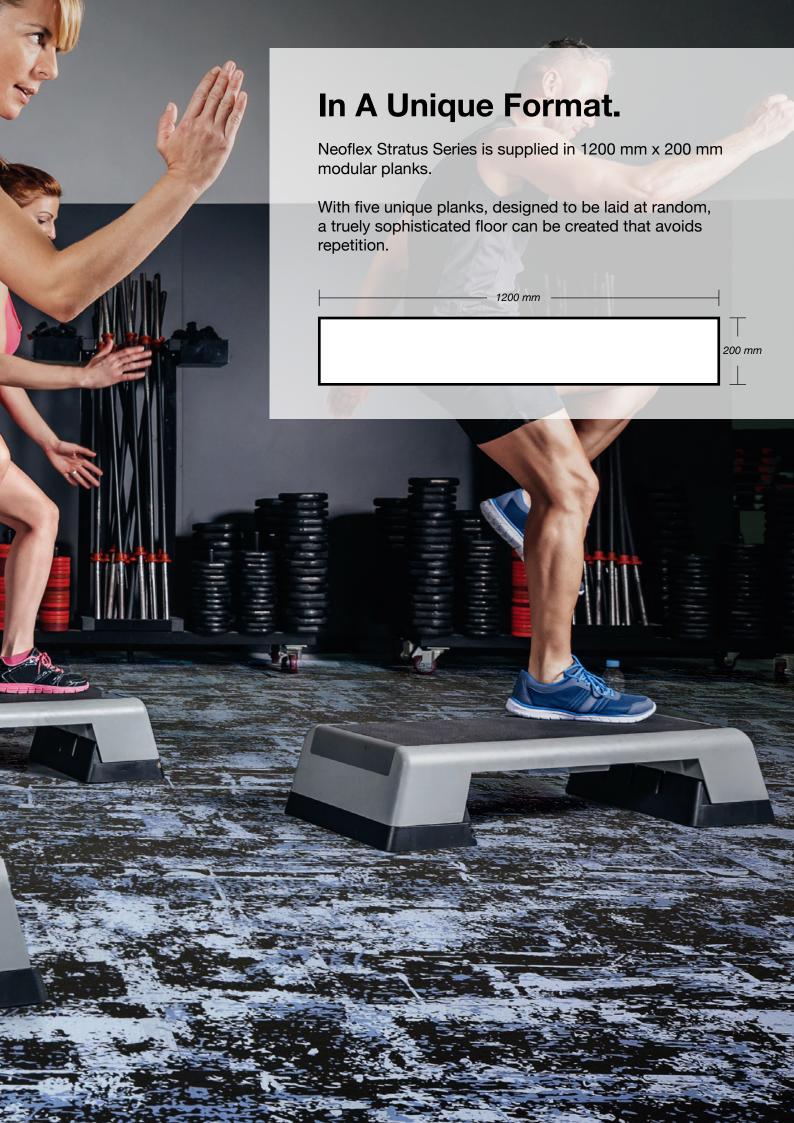



**Colors** 488 RF15 NG16

488 RF15 NG18


**Thickness** 10 mm


**Installation**Alternating Herringbone








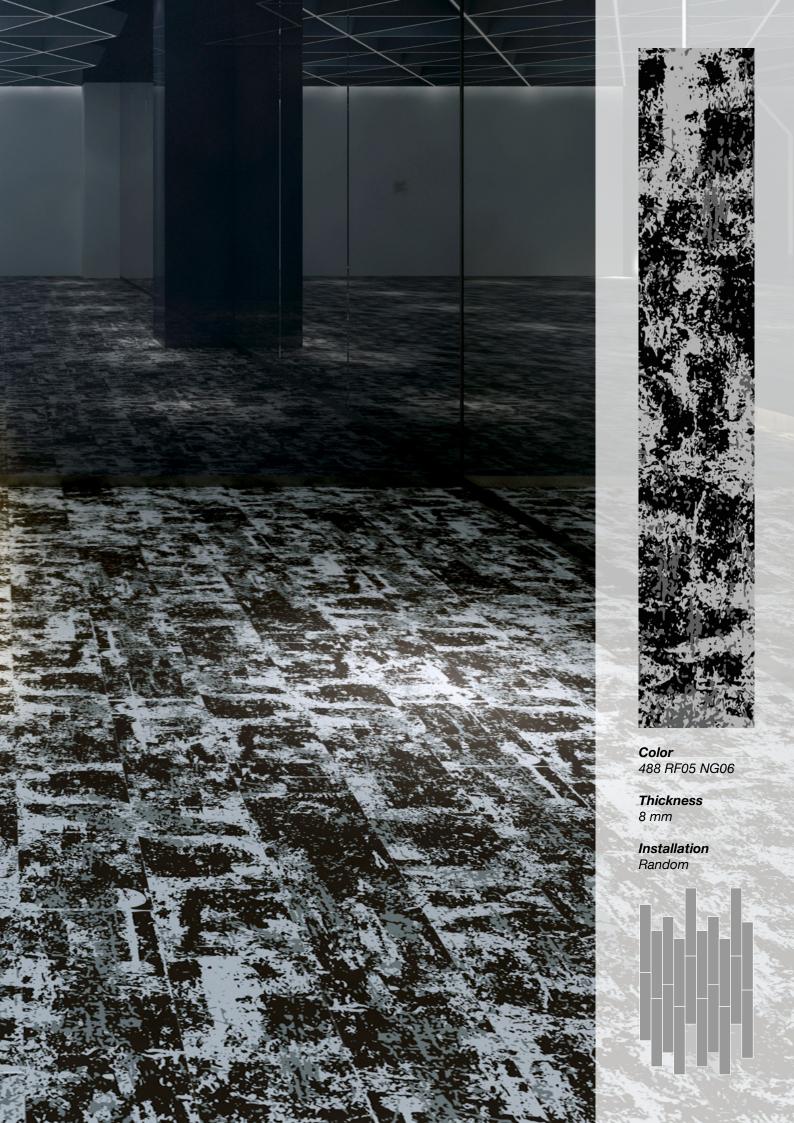


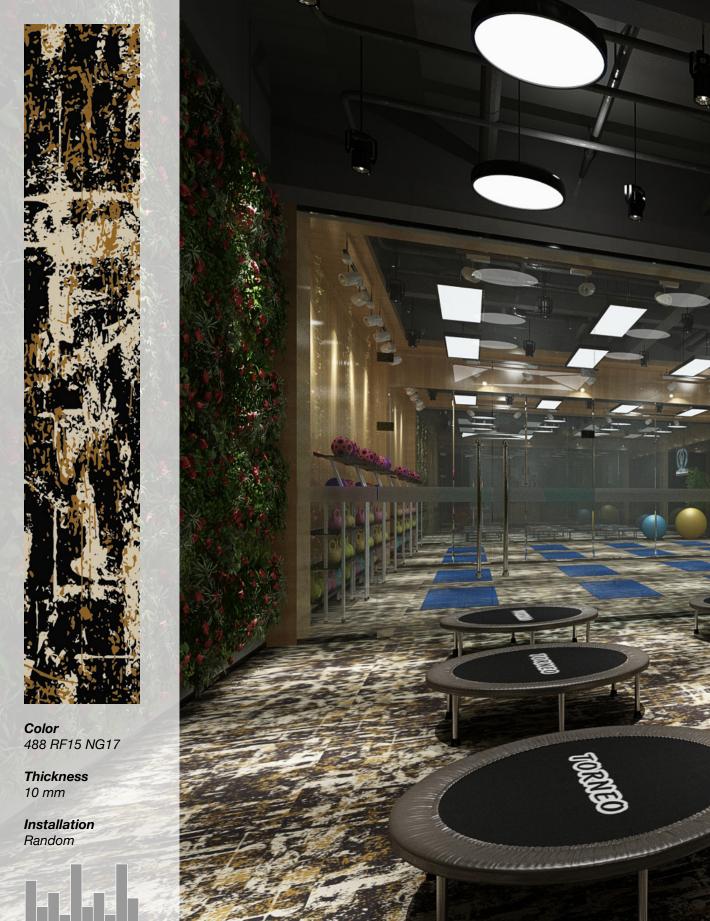





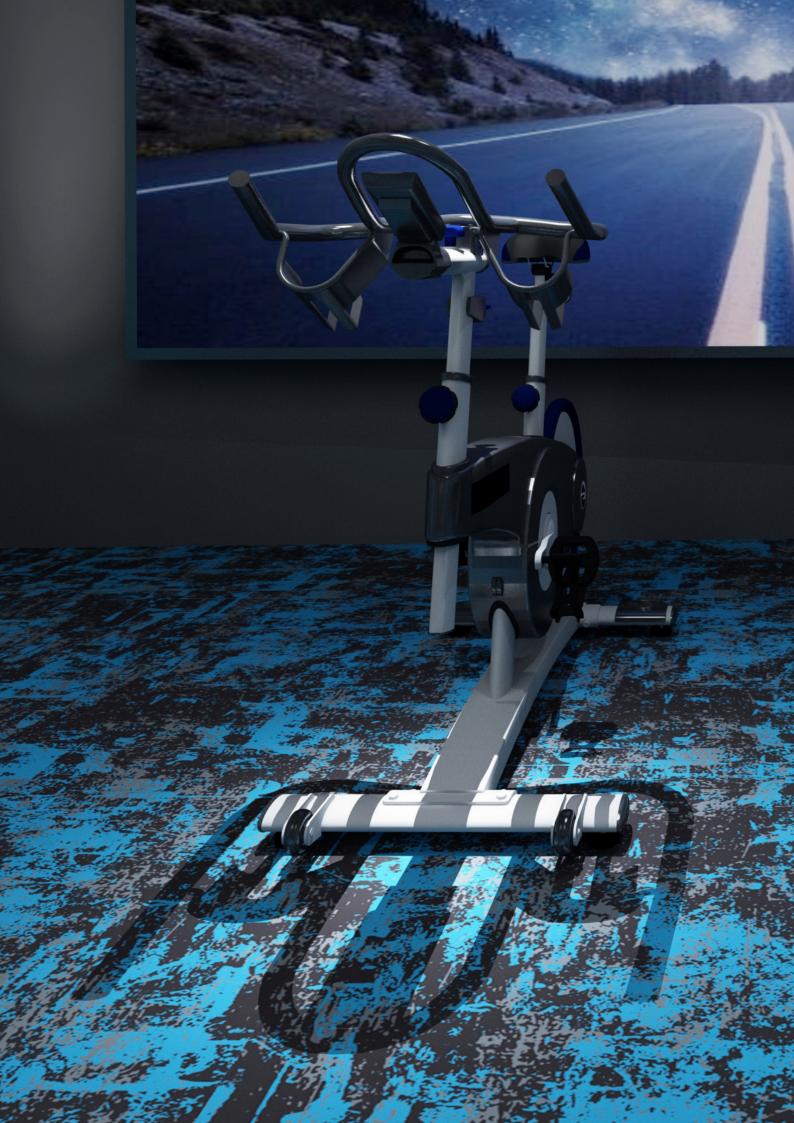

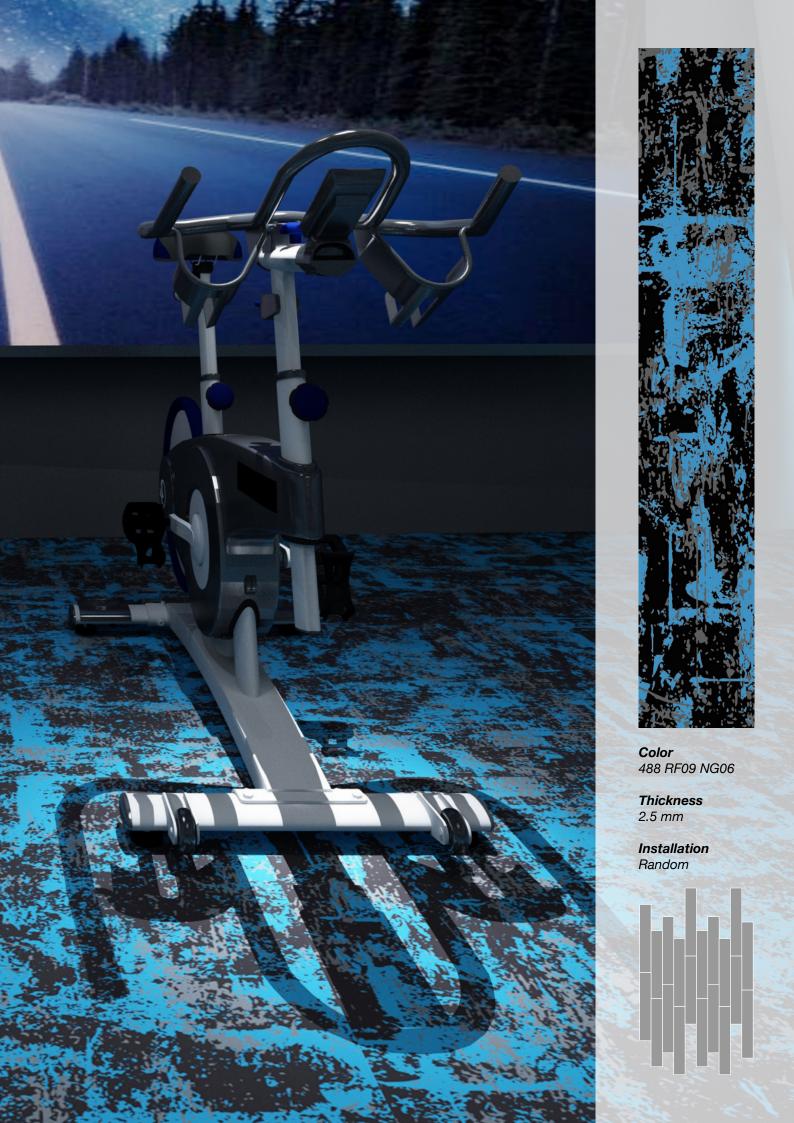



**Colors** 488 RF15 NG07


**Thickness** 6 mm

Installation Alternating Herringbone







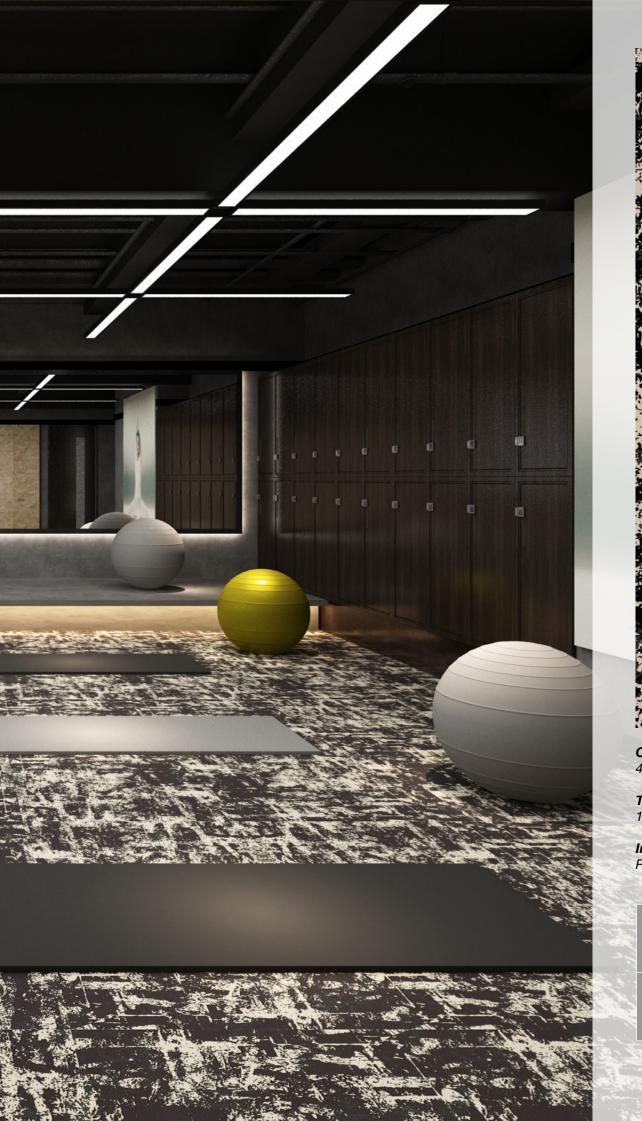



**Color** 488 RF15 NG07

**Thickness** 10 mm

**Installation** Random





488 RF16 NG17

**Thickness** 6 mm

Installation Random & Cut to Contour







### Standard Colors.

Neoflex Stratus Series is available in a wide variety of standard colorways that utilize two pattern colors printed over a black EPDM rubber base.


The below color swatches are meant to give you a first impression of colors and materials. Experience has shown, however, that printed versions of colors cannot in all cases faithfully reproduce the color appearance of the originals. We therefore recommend that you consult your Neoflex partner on your preferred color choices, who will be happy to show you original samples and assist you.

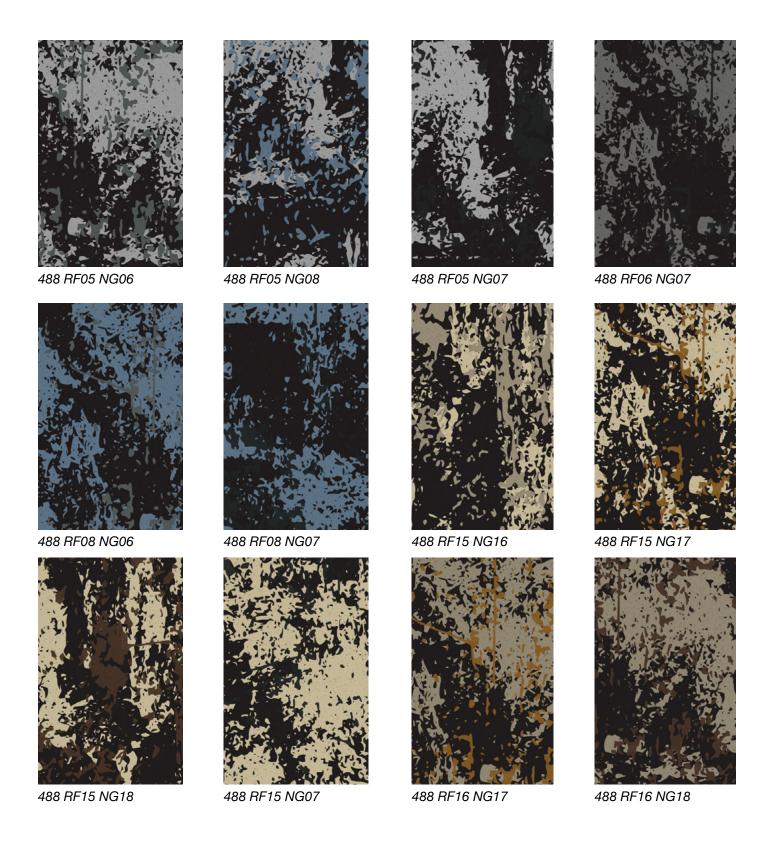

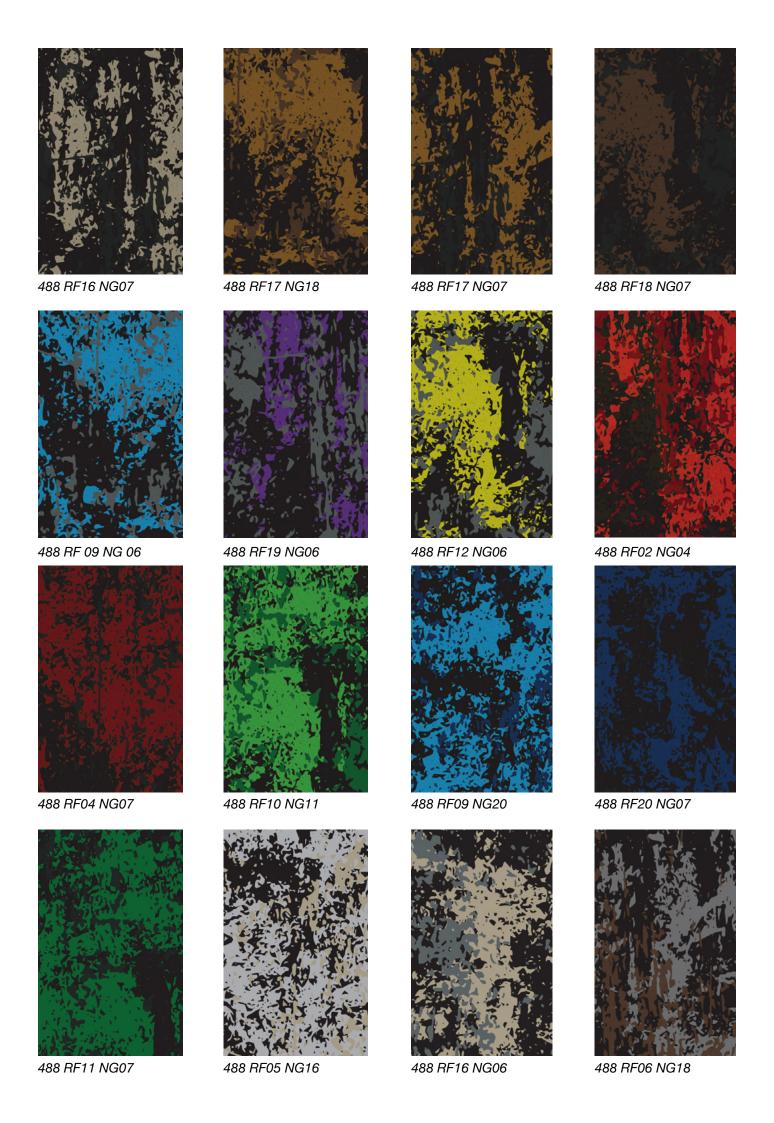

# **Installation Options.**

Neoflex Stratus Series Flooring can be installed in a variety of different ways. Different colors can be combined to great effect.

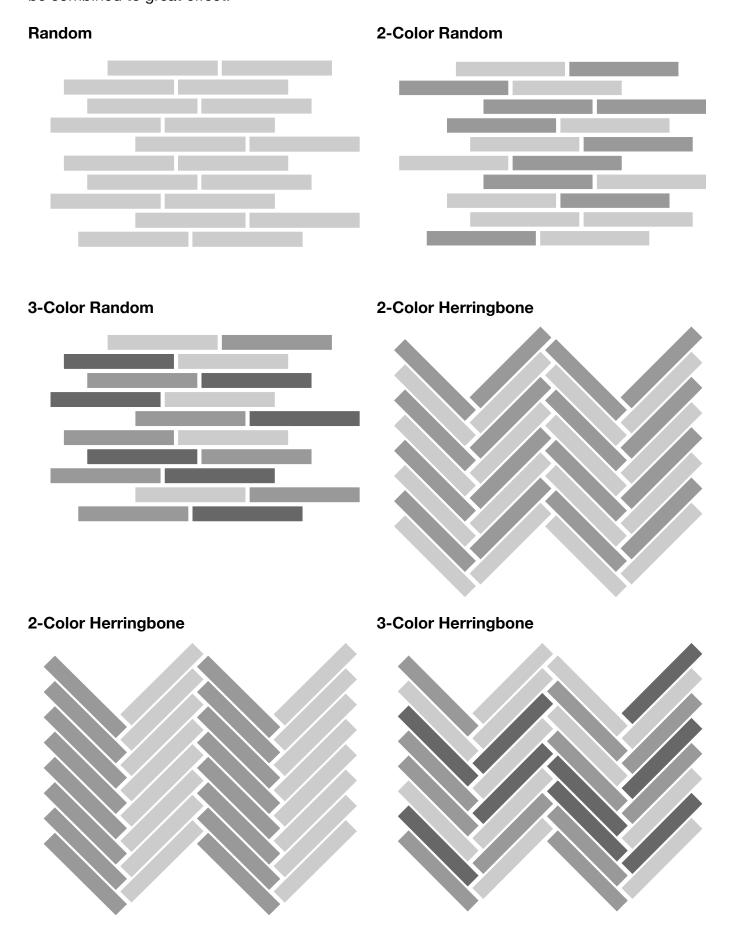

## **Technical Specifications.**


Neoflex Stratus Fitness Flooring is made of 100% synthetic EPDM rubber with a life expectancy of 10+ years backed by a 7-year limited guarantee. Its performance surpasses other types of rubber flooring as well as resilient vinyl, PVC, hardwood, laminated wood or EVA foam.

Property	Standard	Result
Thickness		2.5 mm, 6 mm, 8 mm, 10 mm
Dimensions		1200 mm x 200 mm
Weight		± 4.65 kg/sqm
Hardness	ISO 7619-1:2010	62.1° Shore A
Determination of Flexibility & Deflection	ISO 24344:2012	No cracking in either direction
Enhanced Slip Resistance	EN 13845:2005 Annex C	Moderate
Dynamic Coefficient of Friction	EN 13893:2012	0.7
Light Fastness	ISO 105-B02:2013	7-8 Grade
Residual Indentation	ISO 24343-1:2002	0.18 mm
Dimensional Stability	ISO 23999:2012	0.5%
Flammability	EN 13501-1	Efl (Optional Cfl-s1)
Installation		Stikibak™ or Full-Bond


### Standard Thicknesses.

Neoflex Stratus Series is manufactured in 4 thicknesses, each designed to be used for different fitness flooring applications.

All thicknesses utilize a 2.5mm EDPM top layer. 6mm, 8mm and 10mm thicknesses consist of a 2.5mm EPDM layer laminated to a recycled SBR rubber underlay.

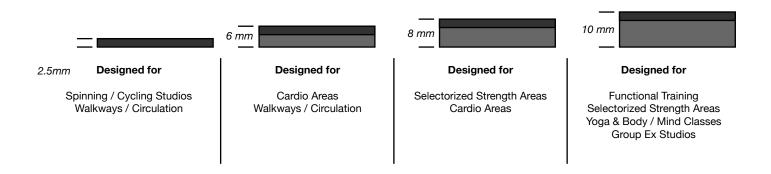

If thicker product is required, rubber underlay can be supplied in rolls, and Neoflex Stratus Series can be adhered on top.

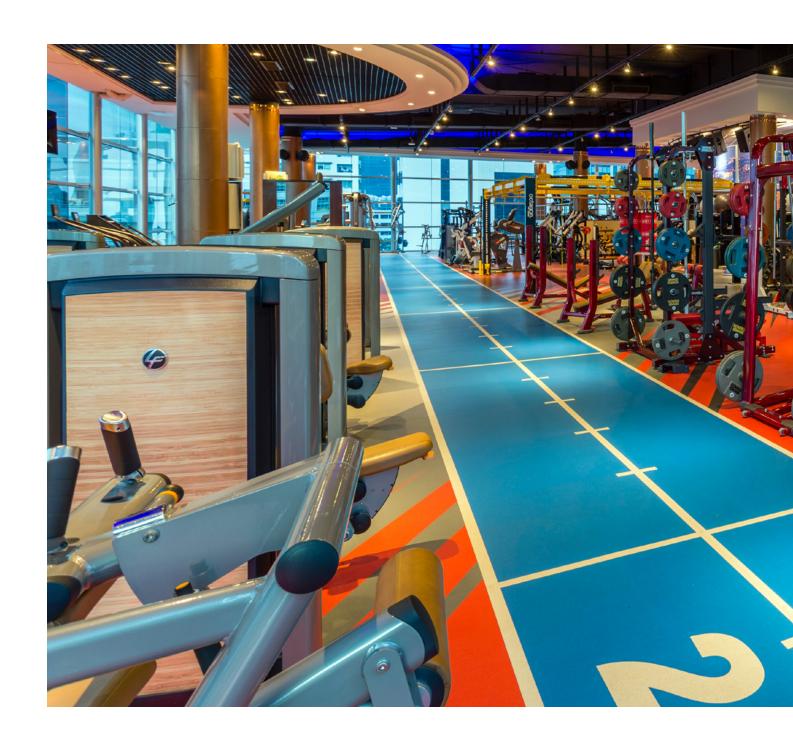



### **Limitless Potential.**

Combining great ideas, cutting edge design, and an eye for functionality, Rephouse manufactures rubber flooring products in many varieties other than Neoflex Stratus Series.

Rephouse manufacturers a complete range of Fitness Flooring solutions. To find out more about these floors, contact your Neoflex partner who will be happy to advise.

Also, visit our website, or join us on social media, for the latest updates.



www.atsport.com.hk



Sales@atsport.com.hk